



SLIM C 18

AREAS OF APPLICATION

- Corridors
- Foreys
- Lobbies
- Shops

Dimensions	203x25 mm
-------------------	-----------

ELECTRICAL DATA

Nominal wattage	18 W
Operating mode	Electronic control gear (ECG)
Nominal voltage	220...240 V
Mains frequency	50/60 Hz
Power factor λ	>0.90

COLORS & MATERIALS

Body material	Aluminum
Housing color	White


PHOTOMETRICAL DATA

Color temperature	2700 K - 6500 K
Luminous flux*	1620 lm
Color rendering index Ra	>70
Luminous efficacy***	90 lm/w

LIGHT TECHNICAL DATA

Beam angle	Wide Distribution
------------	-------------------

LIGHT DISTRIBUTION

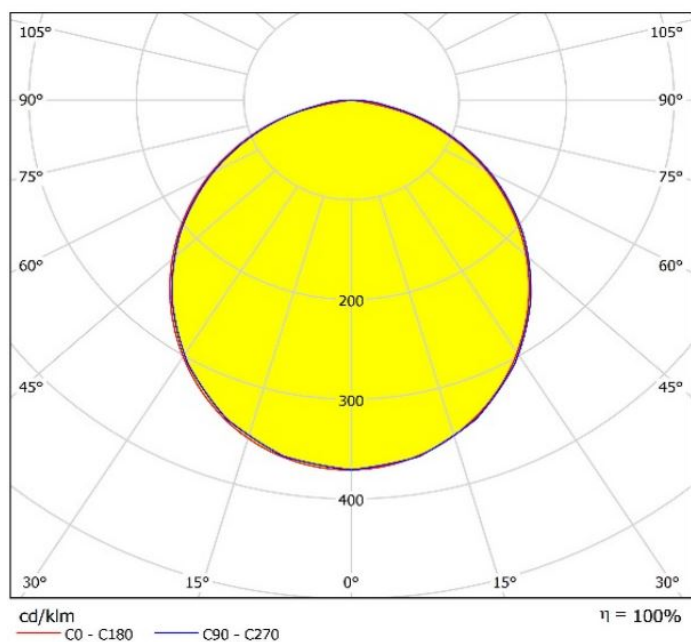

- Luminous flux calculated according to OSRAM JTLMS1 LED chips.
- Based on 6500K Values.
- Luminous flux calculated to light source.
- Luminous flux depends to lens or diffuser.

COLORS & MATERIALS

Product color	White *
Cover material	Opal acrylic diffuser

TEMPERATURES & OPERATING CONDITIONS

Ambient temperature range	-20...50 °C
---------------------------	-------------

ADDITIONAL PRODUCT DATA

Mounting type	Recessed
Mounting location	

OPTIONS

Dimmable**	On Off / 1-10V / DALI
Type of connection	Cable
LED module replaceable	Yes

CERTIFICATES & STANDARDS

Protection class	I
Type of protection	IP40
Standards	TS EN 60598-1 / IEC 60598-1

LOGISTICAL DATA

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume
SS186540WHR	Slim C 18	Shipping carton box 1		

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

- Product color can be ordered with other RAL codes.
- On Off dimmable is standard, 1-10V and DALI are an option.