




TRIMLESS C

AREAS OF APPLICATION

- Shops
- Offices
- Meeting Rooms
- Malls
- Hospitals
- Schools
- Corridors

Diameter	140 mm
Depth	108.5 mm
Cut-out	140 mm

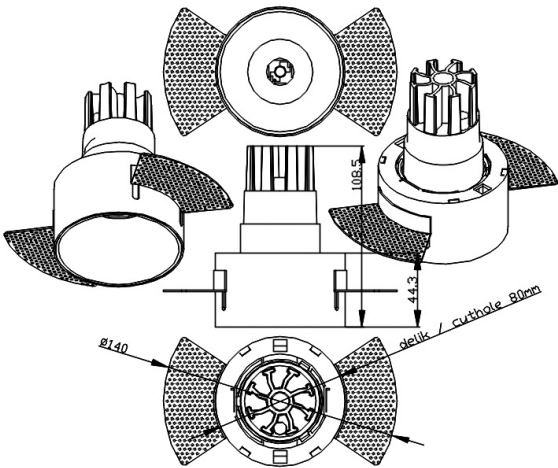

ELECTRICAL DATA

Nominal wattage	8 - 12 W
Operating mode	Electronic control gear (ECG)
Nominal voltage	220...240 V
Mains frequency	50/60 Hz
Power factor $\lambda$	>0.90

COLORS & MATERIALS

Body material	Aluminum dia cast
Housing color	Electrostatic powder paint


PHOTOMETRICAL DATA

Color temperature	2700 K - 6500 K
Luminous flux	>880 - 1210 lm
Color rendering index Ra	>80
Luminous efficiency***	100 lm/W

LIGHT TECHNICAL DATA

Beam angle	Wide Distribution
------------	-------------------

LIGHT DISTRIBUTION

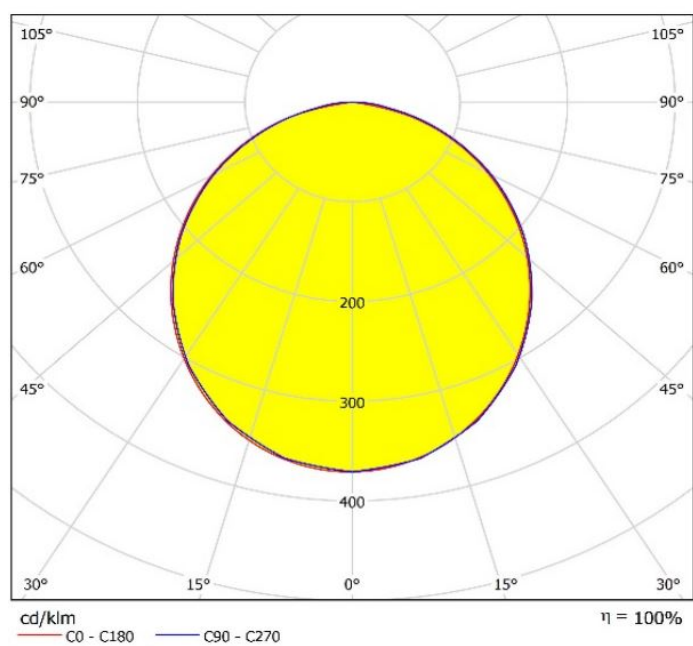

- Luminous flux calculated according to BRANDED LED chips.
- Based on 6500K Values.
- Luminous flux calculated to light source.
- Luminous flux depends to lens or diffuser.

COLORS & MATERIALS

Product color	Electrostatic powder paint
Cover material	Opal

TEMPERATURES & OPERATING CONDITIONS

Ambient temperature range	-20...50 °C
---------------------------	-------------

ADDITIONAL PRODUCT DATA

Mounting type	Surface
Mounting location	Ceiling

OPTIONS

Dimmable**	On Off / 1-10V / DALI
Type of connection	Cable
LED module replaceable	Yes

CERTIFICATES & STANDARDS

Protection class	I
Type of protection	IP20
Standards	TS EN 60598-1 / IEC 60598-1

LOGISTICAL DATA

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume
TLCwwXX20WH	Trimless C	Shipping carton box 1		

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

DISCLAIMER

Subject to change without notice. Errors and omission excepted.  
Always make sure to use the most recent release.

- Product color can be ordered with other RAL codes.
- On Off dimmable is standard, 1-10V and DALI are an option.